



2.0. Features


- Serial RS-232 Interface: Baud Rate = 9.6 Kbps (default), 19.2 Kbps, 38.4 Kbps, 57.6 Kbps, 115.2 Kbps, 230.4 Kbps
- USB interface for power supply
- CCID-like frame format (binary format)
- Smart Card Reader:
 - o Contactless Interface:
 - Read/Write speed of up to 848 Kbps
 - Built-in antenna for contactless tag access, with card reading distance of up to 50 mm (depending on tag type)
 - Supports ISO 14443 Part 4 Type A and B cards and MIFARE® series
 - Built-in anti-collision feature (only one tag is accessed at any time)
 - Supports extended APDU (max. 64 KB)
 - o Contact Card Interface:
 - One full sized contact card slot
 - Supports ISO 7816 Class A, B and C (5 V, 3 V and 1.8 V)
 - Supports microprocessor cards with T=0 or T=1 protocol
 - Supports memory cards
 - o SAM Interface
 - One SAM slot
 - Supports ISO 7816 Class A SAM cards
- Built-in Peripherals:
 - o Two user-controllable LEDs
 - o User-controllable buzzer
- USB Firmware Upgradability
- Compliant with the following standards:
 - o ISO 14443
 - o ISO 7816
 - o CE
 - o FCC
 - o RoHS 2



3.0. Typical Applications

- e-Government
- e-Banking and e-Payment
- e-Healthcare
- Transportation
- Network Security
- Access Control
- Loyalty Program

4.0. Technical Specifications

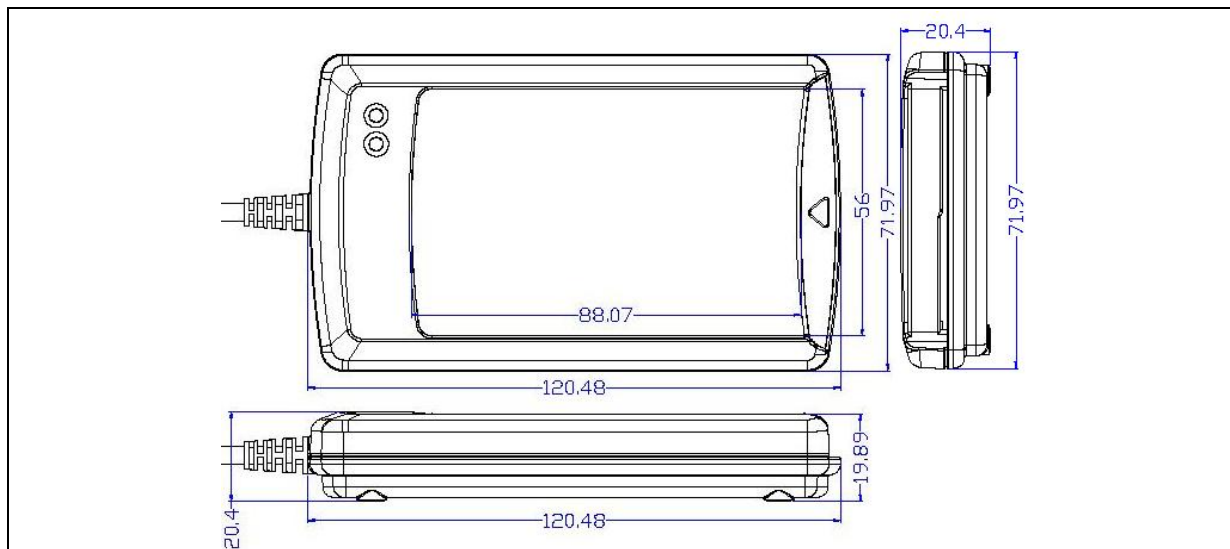

Physical Characteristics

Dimensions	120.5 mm (L) × 72.0 mm (W) × 20.4 mm (H)
Weight	150 g
Color	Black

Serial Host Interface

Protocol	Serial RS-232
Connector Type	DB9
Power Source	Via USB cable
Speed	9.6 Kbps (default), 19.2 Kbps, 38.4 Kbps, 57.6 Kbps, 115.2 Kbps, 230.4 Kbps
Supply Voltage	Regulated 5 V DC
Supply Current	Max. 200 mA
Cable Length	1.5 m fixed cable

Contactless Smart Card Interface

Standard	ISO 14443 A and B Parts 1-4
Protocol	ISO 14443 T=CL for ISO 14443-4 compliant cards
.....	MIFARE Classic Card Protocol, T=CL
Operating Frequency	13.56 MHz
Operating Distance	Up to 50 mm (depends on card type)
Smart Card Read/Write Speed	106 Kbps, 212 Kbps, 424 Kbps, 848 Kbps
Antenna Size	65 mm × 60 mm

Contact Smart Card Interface

Number of Slots	1 Full-sized Card Slot
Standard	ISO 7816 Parts 1-3, Class A, B, C (5 V, 3 V, 1.8 V)
Protocol	T=0; T=1
Supply Current	Max. 60 mA
Smart Card Read/Write Speed	9.6 Kbps – 344 Kbps
Short Circuit Protection	(+5) V/GND on all pins
Clock Frequency	4.80 MHz
Card Connector	Landing
Card Insertion Cycles	Min. 200,000

SAM Card Interface

Number of Slots	1 Standard SIM-sized
Standard	ISO 7816 Class A (5 V)
Protocol	T=0; T=1
Card Connector Type	Contact

Built-in Peripherals

LED	2 single-color: Red and Green
Buzzer	Monotone

Operating Conditions

Temperature	0 °C - 50 °C
Humidity	Max. 90% (non-condensing)
MTBF	500,000 hrs



Certifications/Compliance

ISO 14443, ISO 7816, CE, FCC, RoHS 2

Device Driver Operating System Support

Windows® 2000, Windows® XP, Windows Vista®, Windows® 7, Windows® Server 2003,
Windows® Server 2008, Windows® Server 2008 R2
Linux®



Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.
Microsoft, Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries.