



TI-F11SFP (V1.0R)

SETUP INFO

UPC #	710931160369
Master Carton UPC #	10710931160366
Product Page	http://www.trendnet.com/langen/products/proddetail.asp?prod=125_TI-F11SFP
Additional Images	http://www.trendnet.com/langen/support/supportdetail.asp?prod=125_TI-F11SFP
Alternate Product Name	Hardened Industrial 100/1000 Base-T to SFP Media Converter, DIN-Rail Mount, Wall Mount, IP30
Key Search Words	Industrial media converter, hardened media converter, DIN-rail media converter, poe switches, fiber to Ethernet converter, fiber media converter, media converter, fiber media converter, fiber transceiver, optical Ethernet, Ethernet transceiver, Ethernet coverter, DIN-rail, din rail power supply, gigabit Ethernet converter, fast Ethernet converter, din rail mount, 10/100/1000, 10/100/1000 mbps, Gigabit, Ethernet, metal, 2 Gbps, switching capacity, Power over Ethernet, jumbo frame, 9 KB, hardened, dual redundant power supply, alarm output, extreme temperature, IP30, DIN-rail, integrated, unmanaged, overload protection, industrial switch, SFP, Mini-GBIC, LX/SX, wall mount, media converter, industrial, hardened
Unit Dimensions	21.5 x 16.5 x 6.5 cm (9 x 7 x 3 in.)
Unit Weight	0.63 kg (1.69 lbs.)
Unit Qty per Case	15
Case Dimension	52 x 36 x 23 cm (21 x 15 x 10 in.)
Case Weight	8.61 kg (23 lbs.)
Harmonized Tarriff Code	8517620050
ECCN	5A991
Country of Origin	Taiwan
Product Availability Date	October 2015
Warranty	3 year limited





Hardened Industrial 100/1000 Base-T to SFP Media Converter

TI-F11SFP (v1.0R)

- Hardened IP30 rated 100/1000 Base-T Ethernet to SFP converter
- SFP port accommodates Multi or Single Mode fiber
- Up to 80 km fiber networking distances with the TEG-MGBS80 SFP module
- Includes DIN-rail and wall mounts
- Extreme -40 to 75 °C (-40 to 167 °F) operating temperature range
- Dual redundant power inputs with overload current protection
- Powers supply sold separately (model TI-M6024)

TRENDnet's TI-F11SFP is a reliable IP30 rated 100/1000 Base-T to SFP media converter with hardened components rated for extreme industrial environments. Set 100 or 1000 Mbps throughput speeds, Auto Negotiation, and Link Fault Pass Through (LFP) using the front panel dip switches. Dual redundant power inputs (power supply sold separately: TI-M6024) with overload current protection support zero downtime applications.



Network Ports

1 x Gigabit Ethernet port and 1 x SFP slot



Dip Switches

- Dip Switch 1: 100 or 1,000 Mbps throughput speeds
- Dip Switch 2: Enable/disable port Auto-Negotiation
- Dip Switch 3: Converter or Switch mode
- Dip Switch 4: Enable/disable Link Fault PassThrough (LFP) support



DIN-Rail/Wall Mounts

IP30 rated metal enclosure with included DIN-rail and wall mount hardware



Switching Capacity

2 Gbps switching capacity



Redundant Power

Dual redundant power inputs with overload current protection (power supply sold separately: model TI-M6024)



Jumbo Frame

Sends larger packets, or Jumbo Frames (up to 9 KB), for increased performance



Extreme Temperatures

Hardened converter is rated for an operating temperature range of -40 to 75 °C (-40 to 167 °F)



Electro Magnetic Compliance

Complies with FCC Part 15 Subpart B Class A and CE EN 55022 Class A standards



Certifications

Rated for information technology (ITE) equipment (EN55022/24) and industrial, scientific, and medical (ISM) Equipment (EN55011)



Shock and Vibration Resistant


Rated for shock (IEC 60068-2-27), freefall (IEC 60068-2-32), and vibration (IEC 60068-2-6)



Grounding Point

Grounding point protects equipment from external electrical surges

Networking Solution

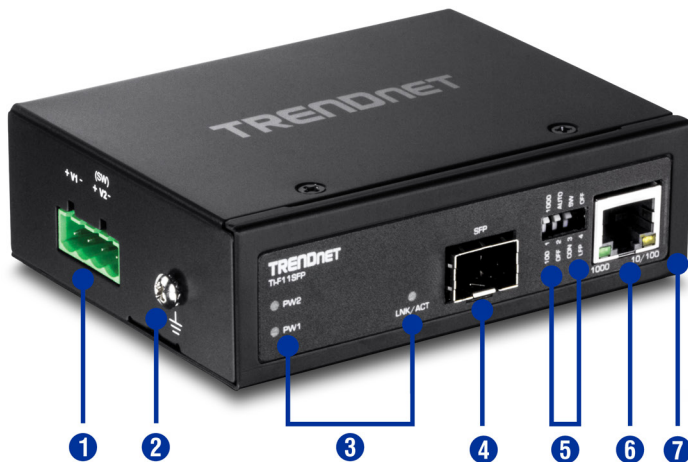

- 1 Terminal block slot
- 2 Grounding point
- 3 LED indicators
- 4 SFP slot
- 5 DIP switches
- 6 Gigabit Ethernet port
- 7 IP30 rated metal housing
- 8 Terminal block
- 9 Wall mounting kit
- 10 DIN-rail mount

Specifications

Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3ab
- IEEE 802.3z
- IEEE 802.3x

Device Interface

- 1 x Gigabit port
- 1 x Gigabit SFP slot
- 4-pin removable terminal block
- LED indicators
- DIP Switch
- DIN-Rail mount
- Wall mount
- Grounding point

Data Transfer Rate

- Ethernet: 10 Mbps (half duplex), 20 Mbps (full duplex)
- Fast Ethernet: 100 Mbps (half duplex), 200 Mbps (full duplex)
- Gigabit: 2000 Mbps (full duplex)

Performance

- Data RAM Buffer: 1024 KB
- Jumbo Frame: 9 KB

Special Features

- Hardened components rated for extreme temperatures

- Dual redundant power inputs
- Auto-Negotiation
- Auto store and forward architecture
- Automatic address learning and address aging
- ESD 8 KV and Surge 6 KV protection

Power

- Input: 12 - 56 V DC or 18 - 36 V AC
- Compatible power supply: TI-M6024 (sold separately)
- Consumption: Max. 3 Watts

Terminal Block

- Redundant power inputs, 4 pin
- Wire range: 0.34 mm² to 2.5 mm²
- Solid wire (AWG): 12-24/14-22
- Stranded wire (AWG): 12-24/14-22
- Torque: 5 lb. – In / 0.5 Nm / 0.56 Nm
- Wire strip length: 7-8 mm

DIP Switch

- 1: Set SFP speed to 100 Mbps or 1000 Mbps
- 2: Enable or disable auto-negotiation on SFP port
- 3: Set to switch or pass through mode
- 4: Turns LFP (Link Fault Pass Through) on or off

MTBF

- 510,304 hours

Housing

- IP30 metal case

- DIN-rail mount
- Wall mount
- Grounding point
- 8 KV ESD protection
- 6 KV surge protection

Operating Temperature

- - 40 to 75 °C (-40 to 167 °F)

Operating Humidity

- Max. 95 % non-condensing

Dimensions

- 113 x 82 x 31 mm (4.4 x 3.2 x 1.2 in.)

Weight

- 152 g (5.4 oz.)

Certifications

- CE
- FCC
- Shock (IEC 60068-2-27)
- Freefall (IEC 60068-2-32)
- Vibration (IEC 60068-2-6)

Warranty

- 3 year limited

Package Contents

- TI-F11SFP
- Quick Installation Guide
- Removable terminal block
- DIN-rail / wall mount kit

