
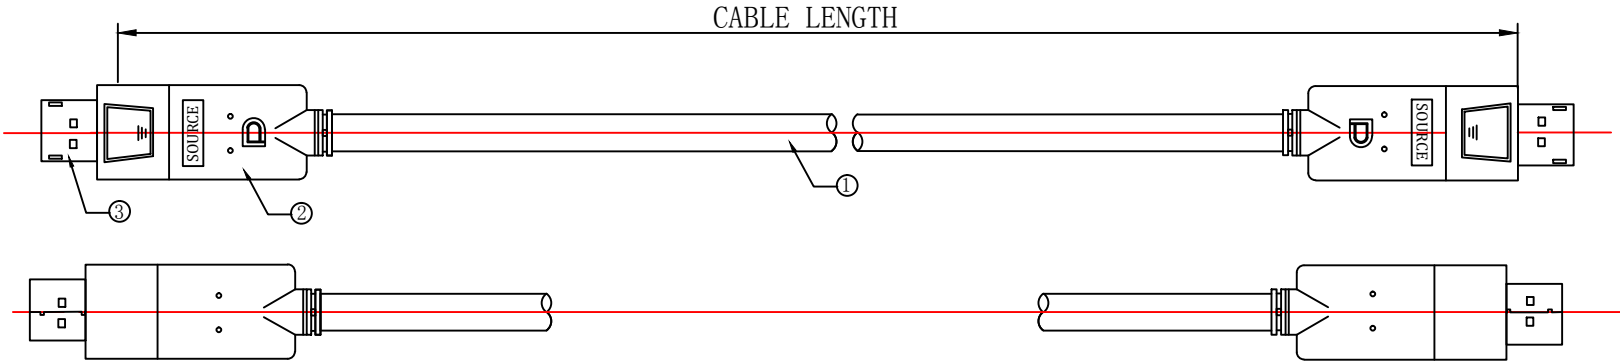


RoHS


| REV. | DESCRIPTION | DATE       |
|------|-------------|------------|
| A    |             | 2015-09-10 |
| B    |             |            |



Resolution: Supports all VESA resolutions up to 4K@60Hz  
0.5m-3m: 4K@60Hz (4:4:4)  
Max. Data Rate: 21.6Gbps  
Other supported Standard: 3D, HDCP, EDID, Full HD(1080P/144Hz), Full HD 3D  
Certificated: Rohs, Reach, CE  
Characteristic Impedance: 75 Ohm  
Operating temperature: -20°C - +70°C  
Bending radius: 25mm

| NO. | SPECIFICATION     |
|-----|-------------------|
| ①   | DP CABLE 28AWG    |
| ②   | PLASTIC MOLDING   |
| ③   | DP CONNECTOR MALE |

CABLE SPECIFICATION

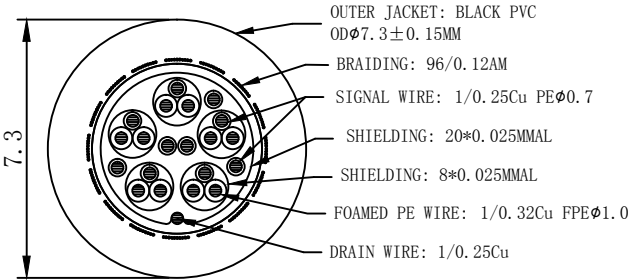

PIN ASSIGNMENT

| P1     | P2     |
|--------|--------|
| PIN 1  | PIN 12 |
| PIN 2  | PIN 11 |
| PIN 3  | PIN 10 |
| PIN 4  | PIN 9  |
| PIN 5  | PIN 8  |
| PIN 6  | PIN 7  |
| PIN 7  | PIN 6  |
| PIN 8  | PIN 5  |
| PIN 9  | PIN 4  |
| PIN 10 | PIN 3  |
| PIN 11 | PIN 2  |
| PIN 12 | PIN 1  |
| PIN 15 | PIN 15 |
| PIN 16 | PIN 16 |
| PIN 17 | PIN 17 |
| PIN 13 | PIN 13 |
| PIN 14 | PIN 14 |
| PIN 18 | PIN 18 |
| PIN 19 | PIN 19 |
| PIN 20 | PIN 20 |



| ITEM NO. | LENGTH |
|----------|--------|
| PRODP0.5 | 0.5    |
| PRODP1   | 1      |
| PRODP1.5 | 1.5    |
| PRODP2   | 2      |
| PRODP3   | 3      |

| TITLE       | DP CABLE |          |     |
|-------------|----------|----------|-----|
| DRAWING NO: |          | DRAWER   | 001 |
| REV.        | A        | CHECKED  |     |
|             |          | APPROVED |     |
|             |          |          |     |