
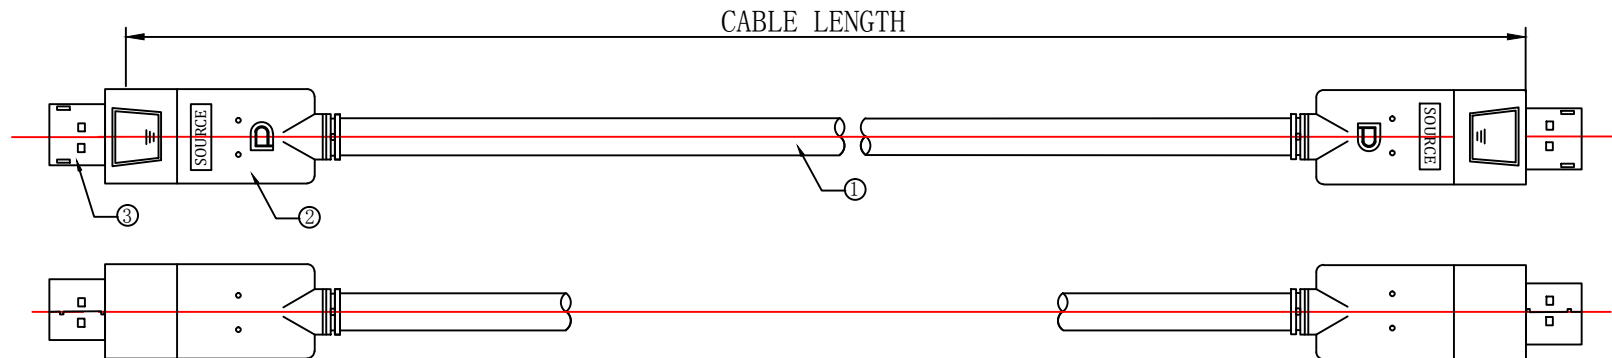


RoHS

REV.	DESCRIPTION	DATE
A		2015-09-10
B		



Resolution: Supports all VESA resolutions up to 4K@60Hz
10m: 4K@60Hz (4:4:4)
15m-20m: 4K@60Hz (4:2:0)
25m-30m: 4K@30Hz

Max. Data Rate:

10m: 21.6Gbps
15m-30m: 10.8Gbps

Other supported Standard: 3D, HDCP, EDID, Full HD(1080P/144Hz),
Full HD 3D

Certificated: Rohs, Reach, CE


Characteristic Impedance: 75 Ohm

Operating temperature: -20°C - +70°C

Bending radius: 65mm

NO.	SPECIFICATION
①	DP CABLE 24AWG
②	PLASTIC MOLDING
③	DP CONNECTOR MALE

CABLE SPECIFICATION

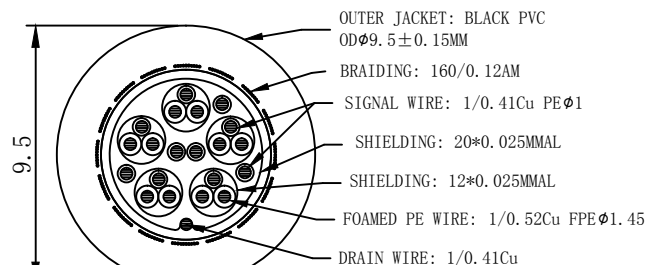

PIN ASSIGNMENT

P1	P2
PIN 1	PIN 12
PIN 2	PIN 11
PIN 3	PIN 10
PIN 4	PIN 9
PIN 5	PIN 8
PIN 6	PIN 7
PIN 7	PIN 6
PIN 8	PIN 5
PIN 9	PIN 4
PIN 10	PIN 3
PIN 11	PIN 2
PIN 12	PIN 1
PIN 15	PIN 15
PIN 16	PIN 16
PIN 17	PIN 17
PIN 13	PIN 13
PIN 14	PIN 14
PIN 18	PIN 18
PIN 19	PIN 19
PIN 20	PIN 20



ITEM NO.	LENGTH
PRODP10	10
PRODP15	15
PRODP20	20
PRODP25	25
PRODP30	30

TITLE	DP CABLE		
DRAWING NO:		DRAWER	001
REV.	A	CHECKED	
		APPROVED	

VIVO LINK