



User Manual

USB 3.1 Type-C to USB3.0
+ HDMI (4Kx2K@30HZ) + Type-C Charging Adapter



ES623001WH

Contents

1.0 Introduction

2.0 Features

3.0 Specifications

4.0 Package contents

5.0 Operation

6.0 Connection diagram

DEAR CUSTOMER

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or using this product. Please keep this manual for future reference.

1.0 Introduction

This is a USB-C to USB 3.0 with HDMI and Type-C charging port hub. The USB3.0 port allows you to connect a USB device or another hub to the host computer, the USB-C female port can charge for the host computer and supply power for the adapter at the same time, and the HDMI port (DP Altmode) allows you to connect an HDMI monitor so that you can watch videos or slideshows on a big screen. It can work on Macbook or Google new Chromebook Pixel and other USB-C supported devices.

2.0 Features

- Support USB-C input, USB3.0 and HDMI output
- Support HDMI 4Kx2K@30Hz, 9Gbps Bandwidth
- Support USB 3.0 super speed (5Gbps) transmission, downward compatible USB2.0
- Support BC1.2, the power of USB-A port can be up to 7.5W (5V/1.5A)
- USB 3.0 port supports to charge and transmit data for the USB device simultaneously
- Support to charge for Macbook or Google new Chromebook Pixel and other USB-C supported devices and supply power for the adapter at the same time
- USB-C female port supplies power up to 60W(20V/3A)
- Multiple USB-C interfaces support plug and play, hot swap
- Easy to use and carry

3.0 Specifications

Input/Output Connector	
Input	USB-C Male x1; USB-C Female x1
Output	HDMI Female x1; USB-A Female x1
Resolutions	
Resolutions	Up to 4KX2K@30HZ
Physical	
Weight	29.4g
Size (L-W-H)	58x40x15 (mm)
Warranty	
Limited Warranty	1 year
Environmental	
Operating Temperature	0°C to +45°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +70°C
Storage Humidity	5% to 90 % RH (no condensation)
Power Supply	
USB3.0 Port	UP to 7.5W (5V/1.5A)
USB-C Female Charging Port	Up to 60W (20/3A)
Regulatory Approvals	
Certifications	FCC,CE
Accessory Adapter	
User Manual	English Version

4.0 Package contents

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- Main unit x1
- User Manual x1


5.0 Operation

- 1) Connect the USB-C male port of this product to Macbook or Chromebook
- 2) Connect HDMI output of this product to HDTV with one HDMI cable
- 3) Connect the USB 3.0 output of this product to a USB 3.0/2.0 device with a USB cable
- 4) Connect the USB-C charging port, it can charge for the host computer and support this product to work simultaneously

Note:

- 1) When connecting the USB-C male port of the adapter to Chromebook, the mouse to be connected to the USB 3.0 port will not work immediately, it will have seconds' delay. This problem also occurs in other similar type-c adapter (including Apple original 3 in 1 Adapter) when connected to Chromebook.
- 2) When plugging in and out the PD Adapter, the connected USB devices will get disconnected flashily and then reconnect in a few seconds, so to prevent possible data loss or corruption, avoid disconnecting the PD Adapter from AC power while transferring data

6.0 Connection diagram

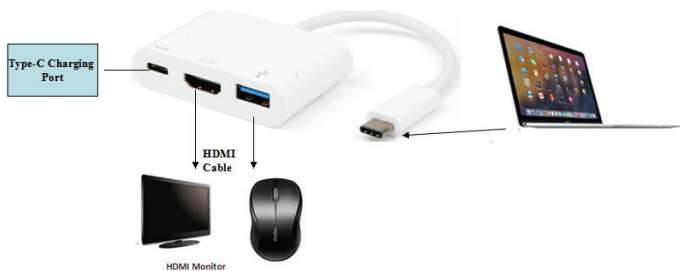

eSTUFF

Please note that all names, models and trademarks are the sole property of their respective owners. eSTUFF® is a registered trademark of EET Group A/S. Device composition and illustration shown on the packaging is for informative purposes only and may differ from the actual product.

Imported into the EU by EET Group A/S
Tempovej 41, 2750 Ballerup, Denmark

Designed in Denmark
Made in China

www.estuff.eu

