
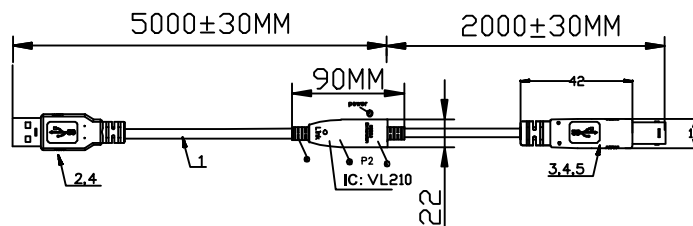


ALL MATERIALS CONFORM TO THE RoHS COMPLIANCE.


RoHS

| REV. | R.S. No. | DESCRIPTION | DATE |
|------|----------|-------------|------|
|      |          |             |      |
|      |          |             |      |
|      |          |             |      |

### SIDE-A



### SIDE-B



#### ELECTRONIC TEST:

- All cable 100% test: open, short, miss wire;
- Resistance: 2.0 ohm max;
- Resistance: 10M ohm min;
- HI-TOP: 300V DC/10ms.

#### PIN OUT

| SIDE-A | COLOR                                         | SIDE-B |
|--------|-----------------------------------------------|--------|
| 1      | RED                                           | 1      |
| 2      | WHITE                                         | 2      |
| 3      | GREEN                                         | 3      |
| 4      | BLACK                                         | 5      |
| 5      | BLUE                                          | 6      |
| 6      | YELLOW                                        | 7      |
| 7      | BLUE/YELLOW<br>DRAIN+PURPLE<br>/ ORANGE DRAIN | 8      |
| 8      | PURPLE                                        | 9      |
| 9      | ORANGE                                        | 10     |
| SHELL  | BRAID                                         | SHELL  |

|          |             |                                                                                                   |        |       |  |
|----------|-------------|---------------------------------------------------------------------------------------------------|--------|-------|--|
| ⑤        |             | Model material :PE                                                                                | KG     | 0.005 |  |
| ④        |             | Model material :PVC45p black                                                                      | KG     | 0.015 |  |
| ③        | Connector   | USB 3.0 B/M terminal, Nickel Plated, blue plastic core                                            | PCS    | 1     |  |
| ②        | Connector   | USB 3.0 A/M terminal, Nickel Plated blue plastic core                                             | PCS    | 1     |  |
| ①        | Cable       | USB 3.0 CABLE 24AWG*1P+D+AL)*2+28AWG*1P+28AWG*2C+AEB]*1C/96b(7*0.1)<br>OD: 5.5mm <b>BLACK</b> PVC | mm     |       |  |
| Item     |             |                                                                                                   |        |       |  |
| ITEM P/N | DESCRIPTION |                                                                                                   | VENDOR | Q'TY  |  |

DRAWN  
Jack

DATE  
03/11-2014

CHECKED  
Alice

DATE  
03/11-2014

CUSTOMER APPROVED

DATE

Ningbo FTZ Tianning Technological  
Electronics Co. Ltd

USB3.0 CABLE A MALE  
/ USB B M CONNECTOR- 7 M



PAGE  
1 OF 1  
REVISION  
A

CUSTOMER P/N  
USB3.0AB7B

Cableking P/N

UNIT  
MM  
SCALE  
FREE