


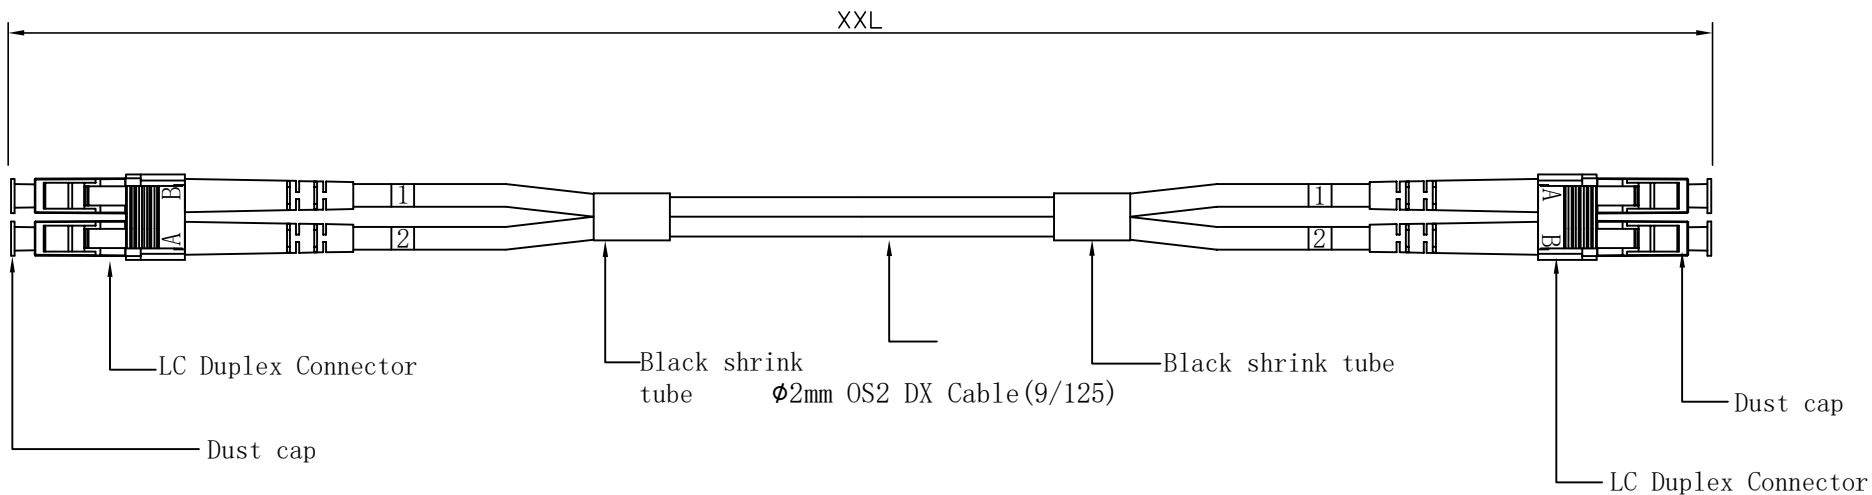

Construction			
NO	Item	Main cable	Material
1	Cable	ϕ2mm OS2 DX Cable (9/125)	LSZH coating
2			
Features			
NO	Item	SM(UPC)	
1	Insttrion loss(I.L.)	≤0.30dB	
2	Ruturn loss(R.L.)	≧ 50dB	
3	Repeatability	≤0.1dB	
4	Temperature	-40℃~+80℃	
5	Durability	≤1000 times	
Mechanical features			
NO	Item		
1	Pull force	≤10KG	

size unit		general tolerance				Model NO															
1 ~ 4		±0.05				LC/UPC-LC/UPC SM 9/125 OS2 2MM DX XXL				proportion		NSL									
4 ~ 16		±0.07		design																	
16 ~ 63		±0.1																			
63 ~ 250		±0.2		drawing				surface treatment				material				Size unit		mm			
	35Z-50Z			verify																	
	6.3Z-18Z																				
	0.8Z-6.3Z			final verify																	